

# KA25

L70  
25°C

320,000 Hours

## AmberLED Small Bentley Kitty Hawk Area, Wall, and Flood Light




Shown with "KA" Kitty Hawk Arm Mounting Option.



Shown with "EH" Easy-Hang Wall Bracket



Shown with "SF" Slipfitter Option.



### Dimensions

<b>Width (D)</b>	13 3/4" (340mm)	<b>Length with Mount (L)</b>
<b>Length (B)</b>	15" (381mm)	
<b>Height (A)</b>	3 3/8" (92mm)	

**Kitty Hawk Arm (KA):** 19 1/4" (491mm)  
**Slipfitter (SF):** 18 3/4" (476mm)  
**Mounting Arm Adaptor (MA):** 19 3/8" (486mm)  
**Yoke (Y):** 18" (457mm)  
**Bracket (BR):** 18 3/4" (476mm)  
**Easy-Hang Wall Bracket (KHEH):** 16" (406mm)

The Jemm AmberLED KA25 luminaire is available with a wide choice of mounting configurations and an IES Type V distribution designed to replace HID lighting systems from 150w to 250w MH or HPS for wildlife or security applications requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required for wildlife protection. Typical applications include general area, parking, flood, security, and accent lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 14 to 25 feet can be used based on light level and uniformity requirements.

### Specifications and Features:

#### Housing:

Die Cast Aluminum Housing and Front Frame, Integral Heat Sinking and Driver Compartment. Photocell Adaptable. Nickel-Plated Stainless Steel Hardware.

#### Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

#### Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

#### Lens:

Tempered Clear Flat Glass Lens

#### Mounting Options:

Mounts with Kitty Hawk Arm, Adjustable Slipfitter, 2 3/8" Diameter Mounting Arm Adapter, Yoke, Two-Piece Bracket or Easy Hang Wall Bracket (Factory Installed).

#### AmberLED:

Aluminum Boards

#### Wattage:

81w: Array: 80.5w, System: 86.6w; (150-250w HID Equivalent.)

#### Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPP Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.

# AmberLED

### Order Information Example:

KA25F81UAMCZKASP

KA25				AM	C			
Model	Optics/Beam	Wattage	Driver	CCT	Lens	Color	Mounting	Options
KA25= AmberLED Small Bentley Kitty Hawk Area, Wall, and Flood Light	F=NEMA 7Hx7V+ I=NEMA 4Hx4V+ +Stock. ♦ 6 Week Lead Time.	81+ 87♦	U=120-277V H=347-480V	AM=Amber	C=Standard Clear Flat Glass Lens	Z=Bronze C=Custom (Consult Factory)	KA=Kitty Hawk Arm SF= Slipfitter MA= Mounting Arm Adapter Y=Yoke BR=Two-Piece Swivel Bracket EH=Easy-Hang Wall Bracket NM=No Mount	SF=Single Fuse DF=Double Fuse SP=Surge Protection M1=Motion Sensor, IR for mounting heights of 20ft to 35ft M2=Motion Sensor, IR for mounting heights of 18ft or less R3=3-Pin Twist Lock Photocell Receptacle R5=5-Pin Twist Lock Photocell Receptacle R7=7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle S23=Internal Microwave Sensor with dimming for mounting heights of 25' or less. (120-277V Only)

### Project Information:

Project Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

Complete Catalog #: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_

### Certification & Listings:



## AmberLED Small Bentley Kitty Hawk Area, Wall, and Flood Light

### Mounting Options:



#### KA25 with Kitty Hawk Arm (KA)

Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.



#### KA25 with Pole Mounting Arm Adaptor (MA)

Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.



#### KA25 with Yoke (Y)

Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.



#### KA25 with "SF" External Mount Slipfitter

External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.



#### KA25 with Two-Piece Swivel Bracket (BR)

Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.






#### KA25 with Easy-Hang Bracket (EH)



Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.


### EPA (Effective Projected Area)

### Shown with Small Kitty Hawk Arm mounting.




















































Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 1	0.60	15 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 2@180° Mount	1.20	30 Lbs
 2@90° Mount	0.82	30 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 3@90° Mount	1.32	45 Lbs
 3@120° Mount	1.20	45 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 4@90° Mount	1.32	60 Lbs


### Accessories & Replacement Parts:

Mounting Accessories (Order Separately, Field Installed)		Accessories (Order Separately, Field Installed)		Replacement Parts (Order Separately, Field Installed)	
 <b>KH20RPZ</b>	 <b>KH20WMZ</b>	 <b>PTSB1SZ</b>	 <b>P18131</b>	 <b>KH25GL</b>	Tempered Clear Flat Glass Lens.
 <b>PTSB290SZ</b>					
 <b>PTSB2180SZ</b>	 <b>PTSB390SZ*</b>	 <b>PTSB3120SZ*</b>	 <b>P18132</b>	 <b>KH25AZ</b>	Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.
 <b>PTSB490SZ*</b>					
 <b>ACCHSG1Z</b>	 <b>PTSB3120SZ*</b>	 <b>PTSB490SZ*</b>	 <b>P18140</b>	 <b>ALMAAZ</b>	Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
 <b>KH25GSZ</b>					
 <b>KH25WG</b>	 <b>PTSB3120SZ*</b>	 <b>KH25BFZ*</b>	 <b>P18142</b>	 <b>KH25YZ</b>	Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.
 <b>ACCHSG3</b>					
 <b>P17117</b>	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>P18150</b>	 <b>FL73SFXZ</b>	External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.
 <b>ACCHSG3</b>					
	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>P18152</b>	 <b>FL73BRZ</b>	Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.
	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>P18156</b>	 <b>KHEHZ</b>	Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.
	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>P18157</b>	 <b>P17117</b>	Internal Microwave Sensor with Dimming, 120-277VAC, 50/60Hz. See P17117 Specification Page for Details.
	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>ACCHSG1Z</b>		
	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>ACCHSG1Z</b>		
	 <b>PTSB490SZ*</b>	 <b>ACCHSG1Z</b>	 <b>ACCHSG1Z</b>		


\*Non-stock item. Consult factory for lead time.

## AmberLED Small Bentley Kitty Hawk Area, Wall, and Flood Light


### Photometric Data

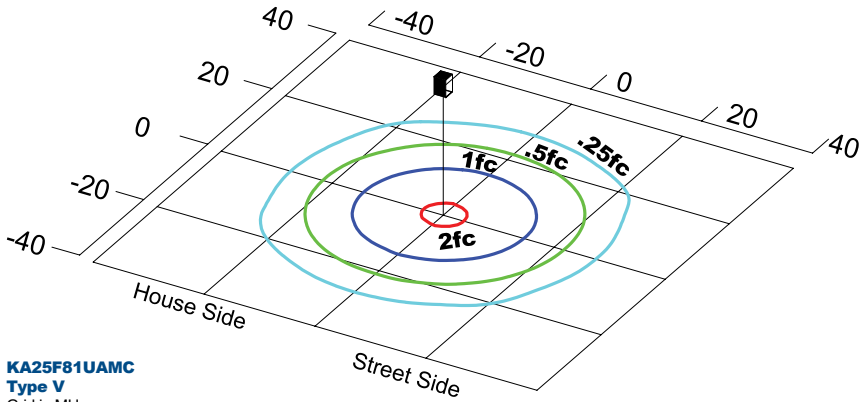

**KA25F81UAMC**  
Type V  
Grid in MH  
MH=20 Feet

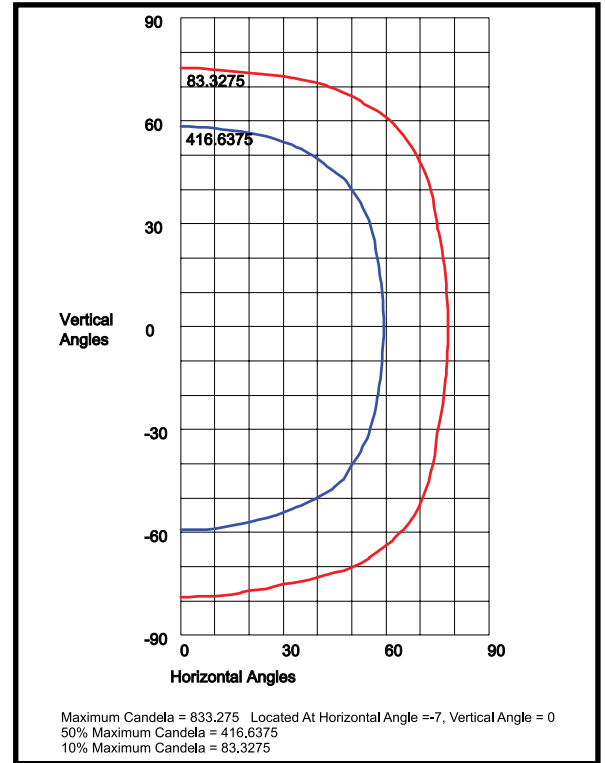

**KA25F81UAMC**  
120H x 120V, NEMA 7H x 7V

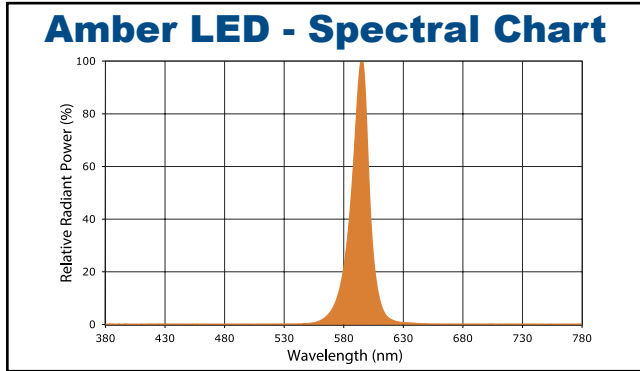

### Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Amber LEDs				
				Lumens	LPW	B	U	G
AmberLED 81w	525	82	F Type V	2,607	32	1	2	0

LED Board Watts	Drive Current (mA)	Input Watts	Beam	Amber LEDs	
				Lumens	LPW
AmberLED 81w	525	82	F 120H x 120V, NEMA 7H x 7V	2,587	32

### Projected Lumen Maintenance

Data shown for Amber LEDs	Input Watts	Compare to MH				
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
TM-21-11	82	1.00	0.98	0.97	0.93	429,000
L70 Lumen Maintenance @ 25°C / 77°F	82	1.00	0.97	0.94	0.88	259,000
TM-21-11	82	1.00	0.97	0.95	0.90	195,000
L80 Lumen Maintenance @ 40°C / 104°F	82	1.00	0.97	0.95	0.90	195,000

**NOTES:**

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.